



Finishes You've Never Seen Before®

PBR/R- PANEL

PBR/R-Panel is the most economical roofing exposed fastener panel.

Available Materials: Aluminum, Copper, Corten/A606-4, Steel

Available Finishes: Bare Steel, Galvalume®/Zincalume®, Galvanized, PVDF, SMP Painted



View Product

SPECIFICATIONS:

Profile Type:	PBR Panel (Purlin Bearing R Panel)	Available Gauges:	22
Rib Height:	1.25"	Substrate:	A606-4 (aka Corten®)
Rib Distance (Pitch):	12" Pitch	Finish:	A606-4 (aka Corten®)
Overall Width:	36"	Fasteners:	Exposed
Coil Feed:	43"	Panel Length:	1' to 52'
Warranty:	Sold AS IS – No Warranty	Recommended Minimum Roof Slope:	3/12
Coverage Area		Installation:	Can be installed over an open purlin system or a solid substrate. Use bead mastic on the overlap if used for a roofing application.
Roof:	36"		
Wall:	36"		

APPLIES TO THE FOLLOWING COLORS/FINISHES:


- A606-4 (aka Corten®)

***Material does not arrive pre-rusted. Panel will rust naturally with exposure to the weather. Use stainless steel screws with a painted brown screw head for installing the panels.



Shown in A606-4 (aka Corten®)

PROFILE:

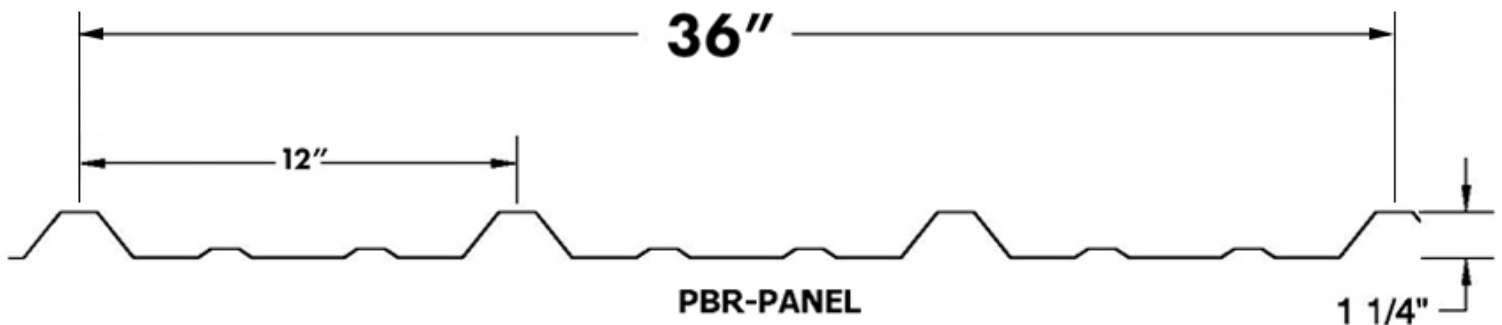

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.

02.01.25