


**WESTERN STATES
METAL ROOFING**



901 W. Watkins St., Phoenix, AZ 85007
(855) 426-7836 | cortenroofing.com
sales@cortenroofing.com

**CORTEN FLAT SHEETS
A606-4 AND A588 WEATHERING STEEL**

48"/60"/72" Widths x 96"/120"/144" Lengths
Custom Widths and Lengths also Available.

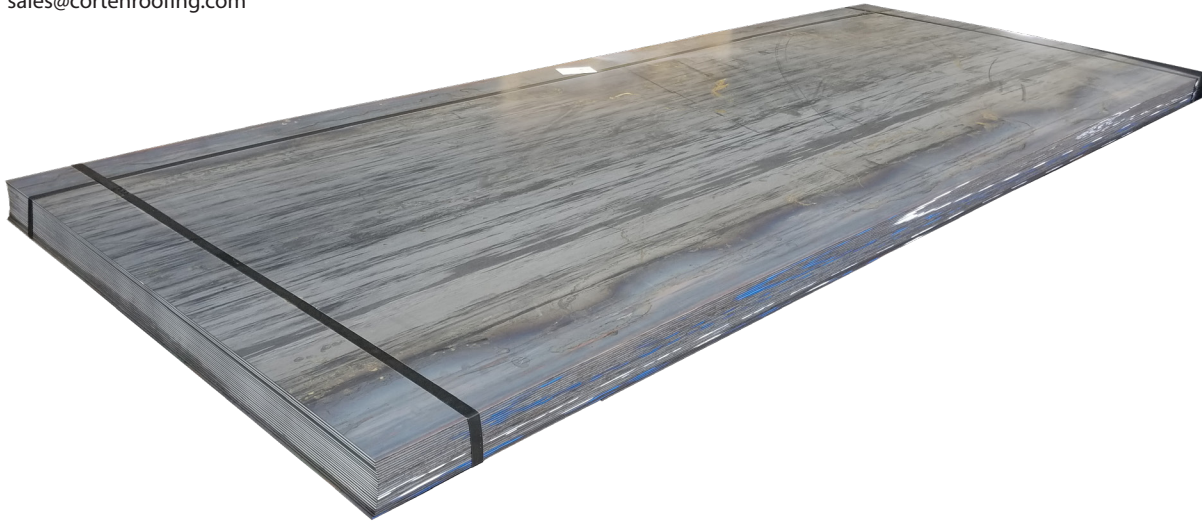

Flat Sheets Availability Chart

Gauge/Thickness

	22	20	18	16	14	12	11	10	8	3/16"	1/4"	3/8"	1/2"	3/4"
72"	■	■	■	■	■	■	■	■	■	●	●	●	●	●
60"	■	■	■	●	●	●	●	●	●	●	●	●	●	●
48"	●	●	●	●	●	●	●	●	●	●	●	●	●	●
46"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
43"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
24"	●	●	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
22"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
20"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
18"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
14"	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲

● In Stock ▲ Custom Order ■ Not Available

RECOMMENDATIONS AND CAUTIONS

- A606-4 and Bare Steel performs best in environments with low humidity
- A606-4 should not be used with dissimilar metals other than stainless steel. This will decrease the lifespan of the product.
- Screws and clips for A606-4/Corten MUST be stainless steel. Screw head will be painted brown.
- Roofing underlayment should be a **HIGH TEMPERATURE UNDERLAYMENT.**
- Not recommended near salt spray environments and frequent rain locations as it will shorten the life expectancy of the products.
- Acid washing will degrade steel performance.
- Rust runoff will likely stain the surrounding surfaces.
- **NO WARRANTIES FOR THESE PRODUCTS**

Material does not arrive pre-rusted. Panel will rust naturally with exposure to the weather. Use stainless steel fasteners with a painted brown screw head.